

and pivot bolts, allow the weight of the vehicle to

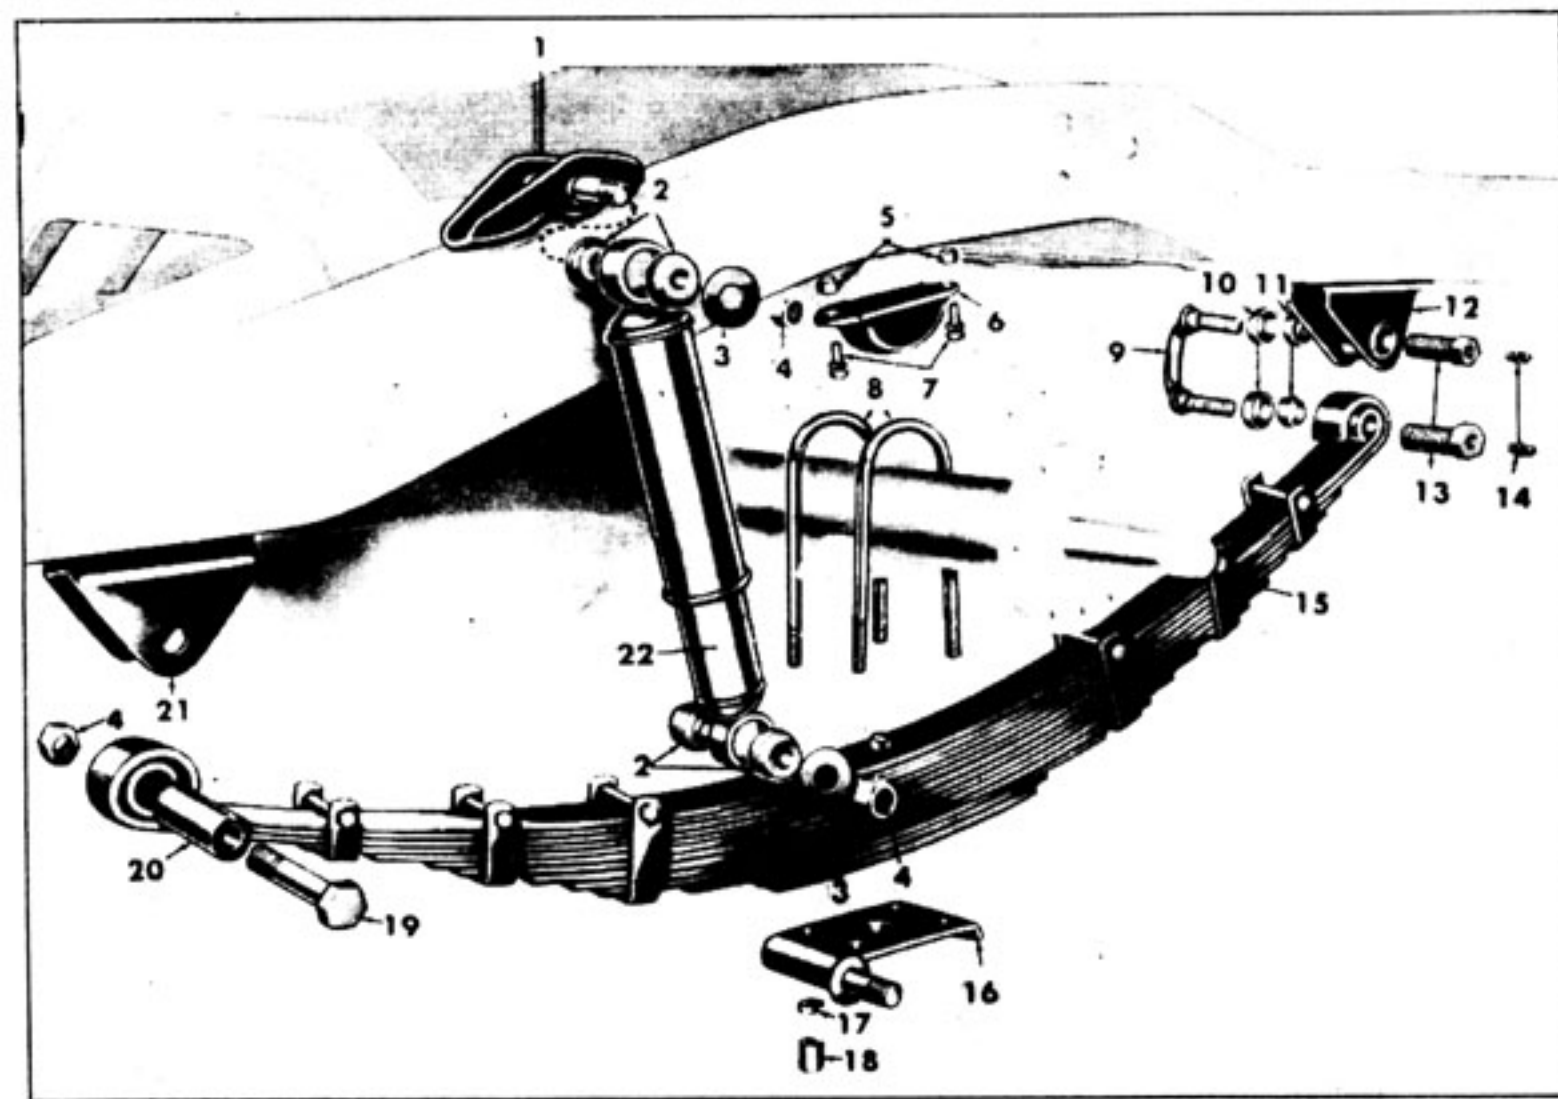


FIG. 305—REAR SPRING AND SHOCK ABSORBER—EARLY CJ-5 AND CJ-6

- 1—Shock Absorber Bracket
- 2—Mounting Pin Bushing
- 3—Washer
- 4—Lock Nut
- 5—Nut
- 6—Rear Axle Bumper
- 7—Bolt
- 8—"U" Bolt
- 9—Shackle
- 10—Retainer
- 11—Grease Seal
- 12—Bracket
- 13—Threaded Shackle Bushing
- 14—Lube Fitting
- 15—Rear Spring Assembly
- 16—Rear Spring Clip Plate
- 17—Lockwasher
- 18—"U" Bolt Nut
- 19—Pivot Bolt
- 20—Rubber Bushing
- 21—Spring Pivot Bracket
- 22—Shock Absorber Assembly